


Pleat Cabinet

MAINTENANCE AND CARE INSTRUCTIONS

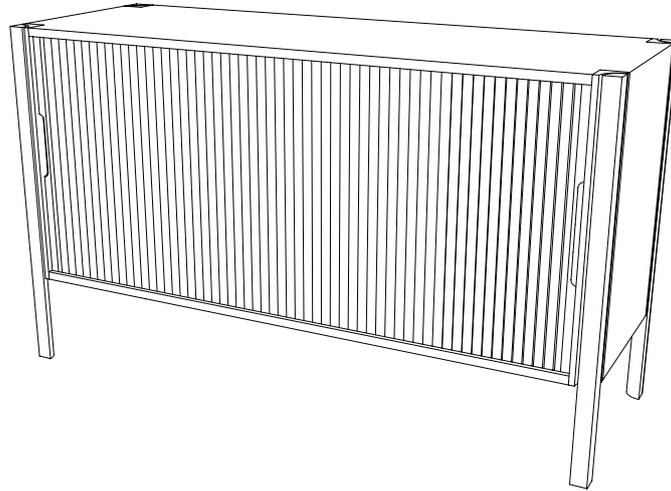

To prolong the life of your furniture and avoid it becoming dry, losses depth of color and become susceptible to staining and water marking, we advise the following:

- 1) If you observe that the wood displays lighter dry patches during the first 3 months we recommend you applying a thin coat of oil to the furniture with a clean lint free cloth, to nourish the wood.
 - 2) This must be repeated annually or whenever the appearance requires it.
 - 3) When you receive your product it has potentially been stored in a warehouse for weeks. If the furniture has a lighter, dry appearance when it arrives due to the variable absorbency of natural oak, apply a little oil on receipt, as described above.
-

SUNLIGHT AND HEAT

Avoid exposing your furniture to excessive heat e.g. by placing it in front of a radiator as this can cause cracking. A minimum 30cm clearance from heat sources is advised.

Direct sunlight can cause the color of wood to change, even if it is stained and lacquered. This will be particularly apparent if the furniture is placed under a window or in a conservatory. Oak will tend to darken in this situation. Never place hot dishes directly on wooden surfaces, we recommend you use table mats. Prolonged use of hot electrical equipment, such as a television, on top of furniture may also cause scorching.

IMPORTANT! Any spills on the furniture must be removed immediately using a cloth to minimize staining. A product that is not correctly oiled will be more susceptible to staining.

Light stains may be removed by gently rubbing in the direction of the grain with 400 grit (very fine) sandpaper and re-oiling as directed above.

NB! We recommend using the following:
Osmo Polyx Hard-Wax - 3041 Natural Matt